

**Uni-Royal**

# DATASHEET

**Product Name** **Wire -Wound Fusible Resistors**

**Part Name** **KNPU Series**

**File No.** **DIP-SP-013**

## **Uniroyal Electronics Global Co., Ltd.**

88#, Longteng Road, Economic & Technical Development Zone, Kunshan, Jiangsu, China

**Tel** +86 512 5763 1411 / 22 /33

**Email** marketing@uni-royal.cn

**Manufacture Plant** Uniroyal Electronics Industry Co., Ltd.

Aeon Technology Corporation

Royal Electronic Factory (Thailand) Co., Ltd.

Royal Technology (Thailand) Co., Ltd.

## 1. Scope

- 1.1 This datasheet is the characteristics of wire wound fusible resistors manufactured by UNI-ROYAL
- 1.2 Suitable for all kinds of protection circuit
- 1.3 Non-flammable coating, could withstand high Temperature
- 1.4 Common resistor with additional safety function, no flame or smoke, no explosion or coating crack when fusing
- 1.5 UL items available (file NO: E306074)
- 1.6 Compliant with RoHS directive.
- 1.7 Halogen free requirement.

## 2. Part No. System

The standard Part No. includes 14 digits with the following explanation:

- 2.1 Wire wound fusible Resistors type, the 1<sup>st</sup> to 3<sup>rd</sup> digits are to indicate the product type and 4<sup>th</sup> digit is the special feature.  
Example: KNPU= Wire wound fusible Resistors type.

### 2.2 5<sup>th</sup>~6<sup>th</sup> digits:

This is to indicate the wattage or power rating. To dieting the size and the numbers,  
The following codes are used; and please refer to the following chart for detail, This is to indicate the wattage or power rating .To distinguish the size and the number, the following codes are used; and please refer to the following chart for details:  
1W~7W ( $\geq 1W$ )

| Wattage     | 1  | 2  | 3  | 5  | 7  |
|-------------|----|----|----|----|----|
| Normal Size | 1W | 2W | 3W | 5W | 7W |

- 2.3 The 7<sup>th</sup> digit is to denote the Resistance Tolerance. The following letter code is to be used for indicating the standard Resistance Tolerance.  
F= $\pm 1\%$  G= $\pm 2\%$  J= $\pm 5\%$  K= $\pm 10\%$

### 2.4 The 8<sup>th</sup> to 11<sup>th</sup> digits is to denote the Resistance Value.

- 2.4.1 For the standard resistance values of 5% series, the 8th digit is "0",the 9<sup>th</sup> & 10<sup>th</sup> digits are to denote the significant figures of the resistance and the 11<sup>th</sup> digit is the number of zeros following; ;

- 2.4.2 The following number s and the letter codes are to be used to indicate the number of zeros in the 11<sup>th</sup> digit:  
 $0=10^0$   $1=10^1$   $2=10^2$   $3=10^3$   $4=10^4$   $5=10^5$   $6=10^6$   $J=10^{-1}$   $K=10^{-2}$   $L=10^{-3}$   $M=10^{-4}$

### 2.4.3 The 12<sup>th</sup>, 13<sup>th</sup> & 14<sup>th</sup> digits.

The 12<sup>th</sup> digit is to denote the Packaging Type with the following codes:


A=Tape/Box (Ammo pack) B=Bulk/Box T=Tape/Reel P=Tape/Box of PT-26 products

- 2.4.4 The 13<sup>th</sup> digit is normally to indicate the Packing Quantity of Tape/Box & Tape/Reel packaging types. The following letter code is to be used for some packing quantities:

1=1000pcs 2=2000pcs 5=5000pcs


- 2.4.5 For some items, the 14<sup>th</sup> digit alone can use to denote special features of additional information with the following codes:  
P=Panasert type 0=NIL 1=Avisert type 1 2=Avisert type 2 3=Avisert type 3 A=Cutting type CO 1/4W-A type B= Cutting type

## 3. Ordering Procedure

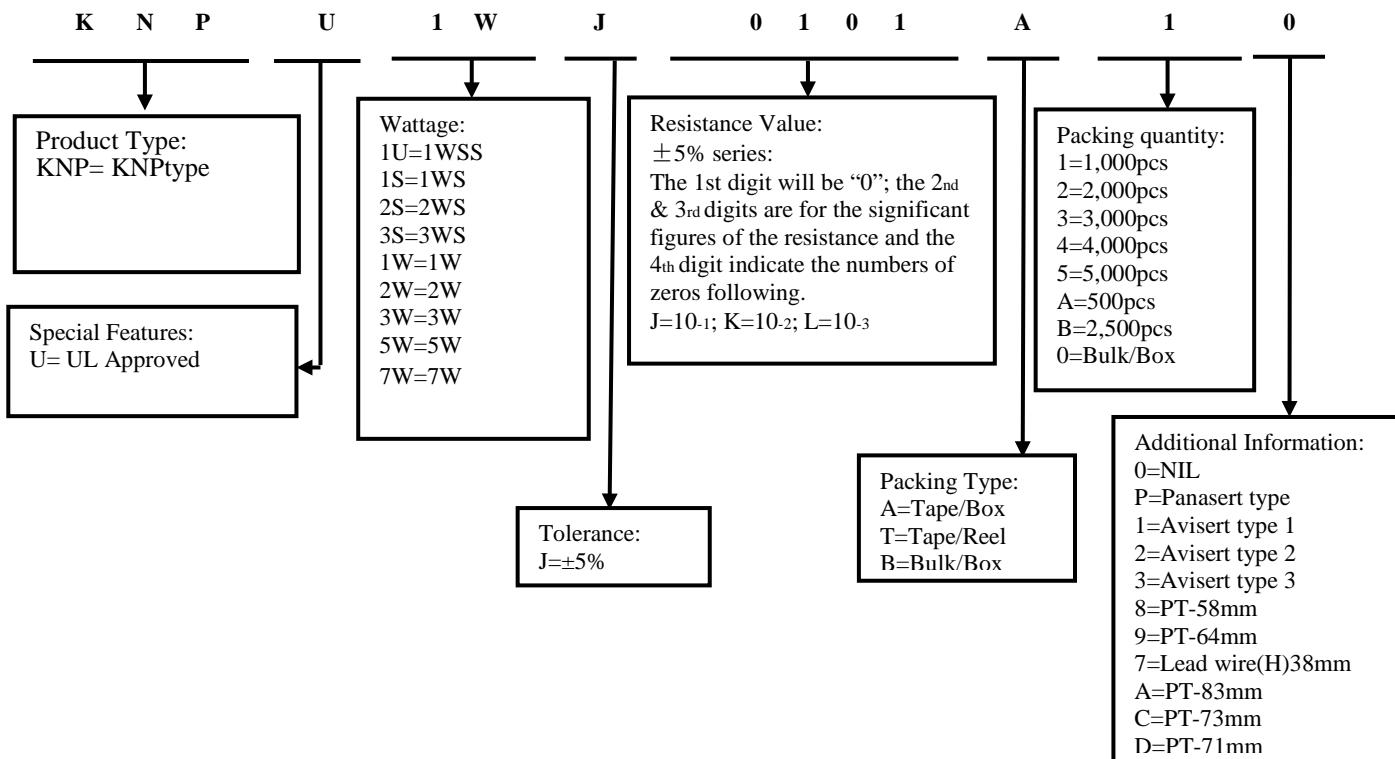

## 4. Marking

Resistors shall be marked with color coding and welding point exposed. Colors shall be in accordance with JIS C 0802 For KNPU  $\pm 5\%$

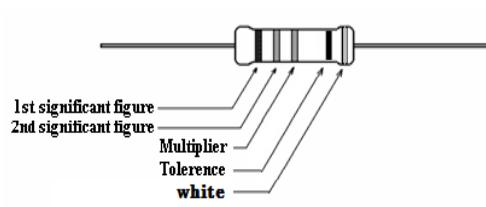


| 1st Band | 2nd Band | 3rd Band | 4th Band                          | 5th Band |            |
|----------|----------|----------|-----------------------------------|----------|------------|
| Black    | = 0      | Black    | = 0                               | Red      | $\pm 2\%$  |
| Brown    | = 1      | Brown    | = 1                               | Gold     | $\pm 5\%$  |
| Red      | = 2      | Red      | = 2                               | Silver   | $\pm 10\%$ |
| Orange   | = 3      | Orange   | = 3                               |          |            |
| Yellow   | = 4      | Yellow   | = 4                               |          |            |
| Green    | = 5      | Green    | = 5                               |          |            |
| Blue     | = 6      | Blue     | = 6                               |          |            |
| Violet   | = 7      | Violet   | = 7                               |          |            |
| Gray     | = 8      | Gray     | = 8                               |          |            |
| White    | = 9      | White    | = 9                               |          |            |
|          |          |          | = Multiply by $1 (10^0)$          |          |            |
|          |          |          | = Multiply by $10 (10^1)$         |          |            |
|          |          |          | = Multiply by $100 (10^2)$        |          |            |
|          |          |          | = Multiply by $1,000 (10^3)$      |          |            |
|          |          |          | = Multiply by $10,000 (10^4)$     |          |            |
|          |          |          | = Multiply by $100,000 (10^5)$    |          |            |
|          |          |          | = Multiply by $1,000,000 (10^6)$  |          |            |
|          |          |          | = Multiply by $10,000,000 (10^7)$ |          |            |
|          |          |          | = Multiply by $0.1 (10^{-1})$     |          |            |
|          |          |          | = Multiply by $0.01 (10^{-2})$    |          |            |

### 4.1 Label:


Label shall be marked with following items:

- (1) Type and style
- (2) Nominal resistance
- (3) Resistance tolerance
- (4) Quantity
- (5) Lot number
- (6) PPM

### Example:

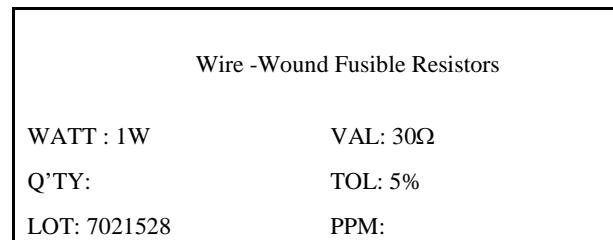


## 5. Ratings & Dimension



| Type      | Dimension(mm) |           |           |              |     | Tolerance | Resistance Range |
|-----------|---------------|-----------|-----------|--------------|-----|-----------|------------------|
|           | D             | L $\pm 1$ | H $\pm 3$ | d $\pm 0.05$ | PT  |           |                  |
| KNPU 1WSS | 2.5+1/-0.3    | 7.5       | 28        | 0.54         | 52  | $\pm 5\%$ | 10Ω              |
| KNPU 1WS  | 3.5+1/-0.5    | 9.5       | 28        | 0.75         | 52  | $\pm 5\%$ | 0.47Ω~240Ω       |
| KNPU 1W   | 4.5+1/-0.3    | 11.5      | 25        | 0.70         | 52  | $\pm 5\%$ | 0.47Ω~240Ω       |
| KNPU 2WS  | 4.5+1/-0.3    | 11.5      | 25        | 0.70         | 52  | $\pm 5\%$ | 0.47Ω~240Ω       |
| KNPU 2W   | 5.5+1/-0.5    | 15.5      | 28        | 0.70         | 64  | $\pm 5\%$ | 0.47Ω~240Ω       |
| KNPU 3WS  | 5.5+1/-0.5    | 15.5      | 28        | 0.70         | 64  | $\pm 5\%$ | 0.47Ω~240Ω       |
| KNPU 3W   | 6.5+1/-0.5    | 17.5      | 28        | 0.75         | 64  | $\pm 5\%$ | 0.47Ω~240Ω       |
| KNPU 5W   | 7.0+1/-0.3    | 19.5      | 38        | 0.75         | B/B | $\pm 5\%$ | 0.47Ω~240Ω       |
| KNPU 7W   | 8.5+1/-0.5    | 24.5      | 38        | 0.75         | B/B | $\pm 5\%$ | 0.47Ω~47Ω        |

## 6. Derating Curve

Resistors shall have a power rating based on continuous load operation at an ambient temperature from -55°C to 70°C. For temperature in excess of 70°C, the load shall be derate as shown in figure 1

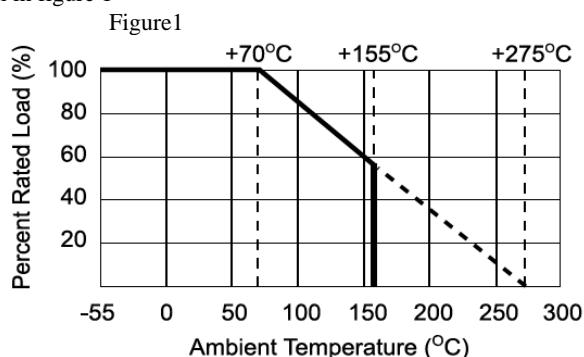

### 6.1 Voltage rating:

Resistors shall have a rated direct-current (DC) continuous working voltage or an approximate sine-wave root-mean-square (RMS) alternating-current (AC) continuous working voltage at commercial-line frequency and waveform corresponding to the power rating, as determined from the following formula:


$$RCWV = \sqrt{P \times R}$$

Where: RCWV = Rated DC or RMS AC continuous working voltage at commercial-line frequency and waveform (VOLT.)

P = power rating (WATT.) R = nominal resistance (OHM)

The overload voltage is 2.5 times RCWV or Max. Overload voltage whichever is less.

## 7. Structure

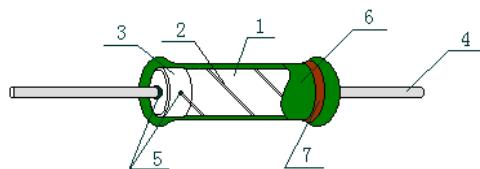

| NO. | Name       | Raw materials                                      |
|-----|------------|----------------------------------------------------|
| 1   | Basic body | Rod Type Ceramics                                  |
| 2   | Resistor   | Resistance Wire Alloy                              |
| 3   | End cap    | Steel (Tin Plated iron Surface)                    |
| 4   | Lead wire  | Annealed copper wire coated with tin               |
| 5   | Joint      | By welding                                         |
| 6   | Coating    | Insulated & Non-Flame paint ( Color : Deep Green ) |
| 7   | Color code | Non-Flame Epoxy Resin                              |


## 8. Performance Specification

| Characteristic          | Limits                                                                                                  | Test Method<br>(JIS-C-5201& JIS-C-5202&UL1412& IEC60115-1)                                                                                                                                                                                                                                                                                                                   |
|-------------------------|---------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Temperature Coefficient | $\geq 20\Omega : \pm 300\text{PPM}/^\circ\text{C}$<br>$< 20\Omega : \pm 400\text{PPM}/^\circ\text{C}$   | JIS-C-5201 4.8<br>4.8 Natural resistance changes per temp. Degree centigrade<br>$\frac{R_2 - R_1}{R_1(t_2 - t_1)} \times 10^6 \cdot (\text{PPM}/^\circ\text{C})$<br>$R_1$ : Resistance Value at room temperature ( $t_1$ ) ;<br>$R_2$ : Resistance at test temperature ( $t_2$ )<br>$t_1$ : +25°C or specified room temperature<br>$t_2$ : Test temperature (-55°C or 125°C) |
| Short-Time Overload     | Resistance change rate is:<br>$\pm(2\% + 0.05\Omega)\text{Max.}$ With no evidence of mechanical damage. | JIS-C-5201 4.13<br>Permanent resistance change after the application of a potential of 2.5 times RCWV or Max. Overload Voltage whichever less for 5 seconds.                                                                                                                                                                                                                 |

|                                 |                                                                                                                                                                                                                                                                   |                                                                                                                                                                                                                                                                                                                                                                                                           |        |          |            |            |
|---------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------|----------|------------|------------|
| Dielectric withstanding voltage | No evidence of flashover mechanical damage, arcing or insulation breakdown                                                                                                                                                                                        | JIS-C-5201 4.7<br>Resistors shall be clamped in the trough of a 90°metallic V-block ,applied voltage AC1000V, for 60-70 seconds.                                                                                                                                                                                                                                                                          |        |          |            |            |
| Terminal strength               | No evidence of mechanical damage                                                                                                                                                                                                                                  | JIS-C-5201 4.16<br>Direct load:<br>Resistance to a 2.5 kg direct load for 10 seconds in the direction of the longitudinal axis of the terminal leads.<br>Twist test:<br>Terminal leads shall be bent through 90°at a point of about 6mm from the body of the resistor and shall be rotated through 360° about the original axis of the bent terminal in alternating direction for a total of 3 rotations. |        |          |            |            |
| Solderability                   | 95% Coverage Min.                                                                                                                                                                                                                                                 | JIS-C-5201 4.17<br>The area covered with a new, smooth, clean, shiny and continuous surface free from concentrated pinholes.<br>Temperature of solder:245°C±3°C<br>Dwell time in solder: 2~3seconds.                                                                                                                                                                                                      |        |          |            |            |
| Resistance to soldering heat    | Resistance change rate is:<br>(1%+0.05Ω ) Max.<br>With no evidence of mechanical damage                                                                                                                                                                           | JIS-C-5201 4.18<br>Permanent resistance change when leads immersed to a point 2.0-2.5mm from the body in 260°C±5°C solder for 10±1 seconds.                                                                                                                                                                                                                                                               |        |          |            |            |
| Load life                       | Resistance change rate is :±(5%+0.05Ω Max..<br>With no evidence of mechanical damage.                                                                                                                                                                             | JIS-C-5201 4.25.1<br>Permanent Resistance change after 1000 hours operating at RCWV or Max.Working Voltage whichever less with duty cycle of 1.5 hours “ON” , 0.5 hour “OFF” at 70±2° C ambient.                                                                                                                                                                                                          |        |          |            |            |
| Load life in humidity           | Resistance change rate is:±(5%+0.05Ω)Max..<br>With no evidence of mechanical damage.                                                                                                                                                                              | JIS-C-5202 4.24<br>Resistance change after 1000 hours (1.5hours “ON” , 0.5hours “OFF” ) at RCWV or Max.Working Voltage whichever less in a humidity test chamber controlled at 40±2° C and 93%±3% RH.                                                                                                                                                                                                     |        |          |            |            |
| Fusing test                     | Resistance should be opened<br>(The Resistance value is over than 50 times from before test value)follow fusing curve condition<br><table border="1"><tr><td>Magnification of power</td><td>Fusing</td></tr><tr><td>35 times</td><td>120s (max)</td></tr></table> | Magnification of power                                                                                                                                                                                                                                                                                                                                                                                    | Fusing | 35 times | 120s (max) | UL1412<br> |
| Magnification of power          | Fusing                                                                                                                                                                                                                                                            |                                                                                                                                                                                                                                                                                                                                                                                                           |        |          |            |            |
| 35 times                        | 120s (max)                                                                                                                                                                                                                                                        |                                                                                                                                                                                                                                                                                                                                                                                                           |        |          |            |            |
| Low Temperature Storage         | Resistance change rate is :±(5%+0.05Ω Max..<br>With no evidence of mechanical damage.                                                                                                                                                                             | IEC 60068-2-1 (Aa)<br>Lower limit temperature , for 2H.                                                                                                                                                                                                                                                                                                                                                   |        |          |            |            |
| High Temperature Exposure       | Resistance change rate is :±(5%+0.05Ω Max..<br>With no evidence of mechanical damage.                                                                                                                                                                             | MIL-STD-202 108A<br>Upper limit temperature , for 16H.                                                                                                                                                                                                                                                                                                                                                    |        |          |            |            |
| Rapid change of temperature     | Resistance change rate is :±(5%+0.05Ω Max..<br>With no evidence of mechanical damage.                                                                                                                                                                             | JIS-C-5201 4.19<br>30 min at lower limit temperature and 30 min at upper limit temperature , 100 cycles.                                                                                                                                                                                                                                                                                                  |        |          |            |            |

## 9. Packing

### 9.1 Tapes in Box Packing

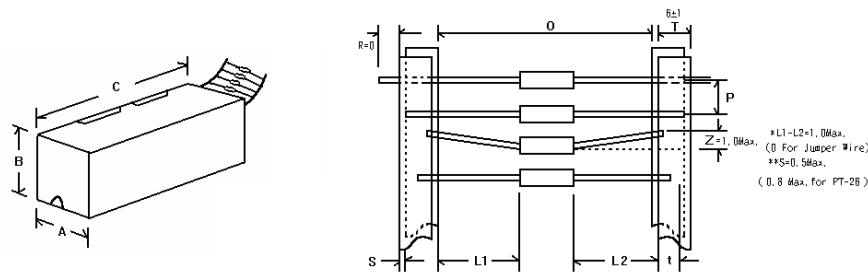


Dimension of T/B (mm)

| Part No.  | O          | P            | A $\pm$ 5 | B $\pm$ 5 | C $\pm$ 5 | Qty/Box  |
|-----------|------------|--------------|-----------|-----------|-----------|----------|
| KNPU 1W   | 52 $\pm$ 1 | 5 $\pm$ 0.3  | 80        | 82        | 255       | 1,000pcs |
| KNPU 2W   | 64 $\pm$ 5 | 10 $\pm$ 0.5 | 90        | 119       | 255       | 1,000pcs |
| KNPU 3W   | 64 $\pm$ 5 | 10 $\pm$ 0.5 | 90        | 88        | 255       | 500pcs   |
| KNPU 1WSS | 52 $\pm$ 1 | 5 $\pm$ 0.3  | 75        | 98        | 255       | 1,000pcs |
| KNPU 1WS  | 52 $\pm$ 1 | 5 $\pm$ 0.3  | 75        | 70        | 255       | 1,000pcs |
| KNPU 2WS  | 52 $\pm$ 1 | 5 $\pm$ 0.3  | 80        | 82        | 255       | 1,000pcs |
| KNPU 3WS  | 64 $\pm$ 5 | 10 $\pm$ 0.5 | 90        | 119       | 255       | 1,000pcs |

\*The packing quantity depends on the actual packing quantity

### 9.2 Bulk in Box Packing:

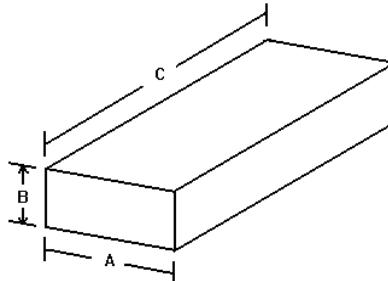

| Part No. | A $\pm$ 5 | B $\pm$ 5 | C $\pm$ 5 | Qty/Box   |
|----------|-----------|-----------|-----------|-----------|
| KNPU7W   | 140       | 80        | 240       | 25/400pcs |

\*The packing quantity depends on the actual packing quantity

## 10. Note

- 10.1. UNI-ROYAL recommend products store in warehouse with temperature between 15 to 35°C under humidity between 25 to 75%RH. Even under storage conditions recommended above, solder ability of products will be degraded stored over 1 year old.
- 10.2. Cartons must be placed in correct direction which indicated on carton, otherwise the reel or wire will be deformed.
- 10.3. Storage conditions as below are inappropriate:
  - a. Stored in high electrostatic environment
  - b. Stored in direct sunshine, rain, snow or condensation.
  - c. Exposed to sea wind or corrosive gases, such as Cl<sub>2</sub>, H<sub>2</sub>S, NH<sub>3</sub>, SO<sub>2</sub>, NO<sub>2</sub>, etc.



# Wire-wound Fusible Resistors



## 11. Record

| Version | Description                                            | Page | Date         | Amended by  | Checked by |
|---------|--------------------------------------------------------|------|--------------|-------------|------------|
| 1       | First version                                          | 1~6  | Mar.20, 2018 | Haiyan Chen | Nana Chen  |
| 2       | 1.Modify the Derating Curve<br>2.Modify characteristic | 5~6  | Feb.23, 2019 | Haiyan Chen | Yuhua Xu   |
| 3       | Modify characteristic                                  | 4~5  | Nov.15, 2019 | Haiyan Chen | Yuhua Xu   |
| 4       | Delete a 1WS dimension                                 | 3    | May.13, 2020 | Haiyan Chen | Yuhua Xu   |
| 5       | Modify the color ring label                            | 3    | Aug.18, 2021 | Haiyan Chen | John Zhao  |
| 6       | Modify the temperature coefficient test conditions     | 4    | Oct.28, 2022 | Haiyan Chen | Yuhua Xu   |
| 7       | Increased standard color code system                   | 3    | Apr.01, 2024 | Haiyan Chen | Yuhua Xu   |
| 8       | Modify the derating curve                              | 4    | Jun.11, 2025 | Haiyan Chen | Yuhua Xu   |
| 9       | Modify the packaging size and the number of packages   | 6    | Jul.30, 2025 | Haiyan Chen | Yuhua Xu   |
| 10      | Modify the dimension                                   | 3    | Jan.06, 2026 | Haiyan Chen | Yuhua Xu   |

© Uniroyal Electronics Global Co., Ltd. All rights reserved. Specification herein will be changed at any time without prior notice