



# DATASHEET

**Product Name** **Radial Type Cement Fixed Resistors**

**Part Name** **PRMB Series**

**File No.** **DIP-SP-031**

## **Uniroyal Electronics Global Co., Ltd.**

88#, Longteng Road, Economic & Technical Development Zone, Kunshan, Jiangsu, China

Tel +86 512 5763 1411 / 22 /33

Email [marketing@uni-royal.cn](mailto:marketing@uni-royal.cn)

Manufacture Plant Uniroyal Electronics Industry Co., Ltd.

Aeon Technology Corporation

Royal Electronic Factory (Thailand) Co., Ltd.

Royal Technology (Thailand) Co., Ltd.

## 1. Scope

This datasheet is the characteristics of Radial Type Cement Fixed Resistors manufactured by UNI-ROYAL.

1.1 Compliant with RoHS directive.

1.2 Halogen free requirement.

## 2. Part No. System

The standard Part No. includes 14 digits with the following explanation:

2.1 For Cement Fixed Resistors, these 4 digits are to indicate the product type but if the product type has only 3 digits, the 4<sup>th</sup> digit will be "0"

Example:

PRMB=PRMB type

2.2 5<sup>th</sup>~6<sup>th</sup> digits:

2.2.1 For power of 1 watt to 16 watt ,the 5th digit will be a number or a letter code and the 6th digit will be the letters of W.

Example: 7W=7W

2.3 The 7<sup>th</sup> digit is to denote the Resistance Tolerance. The following letter code is to be used for indicating the standard Resistance Tolerance.

J=±5% K=±10%

2.4 The 8th to 11<sup>th</sup> digits is to denote the Resistance Value.

2.4.1 For Cement Fixed Resistors the 8th digits will be coded with "W" or "P" to denote Wire-wound type or Power Film type respectively of the Cement Fixed Resistor product. The 9th to 11th please refer to point a) of item 4.

Example: W12J=1.2Ω      W120=12Ω      P273=27KΩ

2.5 The 12<sup>th</sup>, 13<sup>th</sup> & 14<sup>th</sup> digits.

2.5.1 The 12<sup>th</sup> digit is to denote the Packaging Type with the following codes:

B=Bulk/Box


2.5.2 The 13<sup>th</sup> digit is normally to indicate the Packing Quantity, This digit should be filled with "0"for the Cement products with "Bulk/Box" packing requirements.

2.5.3 For some items, the 14<sup>th</sup> digit alone can use to denote special features of additional information with the following codes or standard product

Example: 0= standard product; I=Non-Inductive


## 3. Ordering Procedure

(Example: PRMB 7W ±5% 100KΩ B/B )

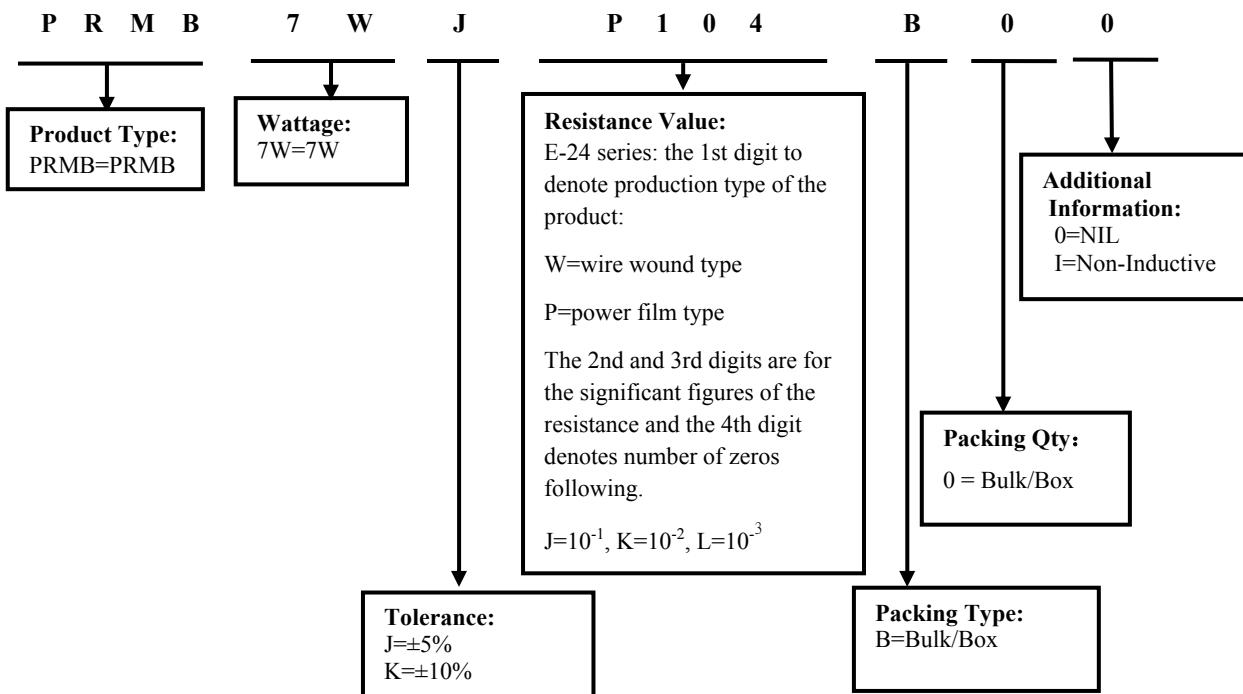

#### 4. Marking

Example:

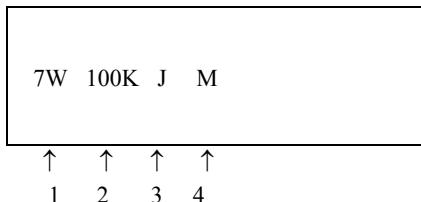

Code description and regulation:

1. Wattage Rating
2. Nominal Resistance Value
3. Resistance Tolerance. J:  $\pm 5\%$   
K:  $\pm 10\%$

#### 4. Pattern:

M: Power film

W: Wire wound

Color of marking: Black Ink


Note: The marking code shall be prevailed in kind!

#### 5. Ratings & Dimension



Type	Dimension(mm)					Max Working Voltage	Max Overload Voltage	Resistance Range	
	W $\pm 1$	D $\pm 1$	L $\pm 1$	P $\pm 1$	d $\pm 0.05$			Wire Wound	Power Film
PRMB 7W	12.5	9	38	5	0.75	500V	1000V	0.1 $\Omega$ -680 $\Omega$	681 $\Omega$ -200K $\Omega$

#### 6. Derating Curve

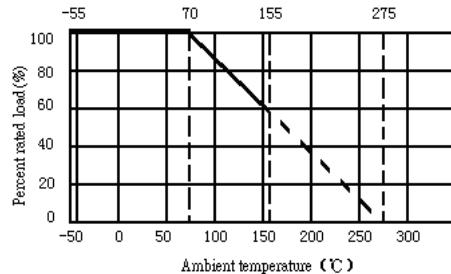

##### 6.1 Voltage rating:

Resistors shall have a rated direct-current (DC) continuous working voltage or an approximate sine-wave root-mean-square (RMS) alternating-current (AC) continuous working voltage at commercial-line frequency and waveform corresponding to the power rating, as determined from the following formula:


$$RCWV = \sqrt{P \times R}$$

Where: RCWV = rated dc or RMS ac continuous working voltage at commercial-line frequency and waveform (VOLT.)

P = power rating (WATT.)

R = nominal resistance (OHM)

## 7. Structure

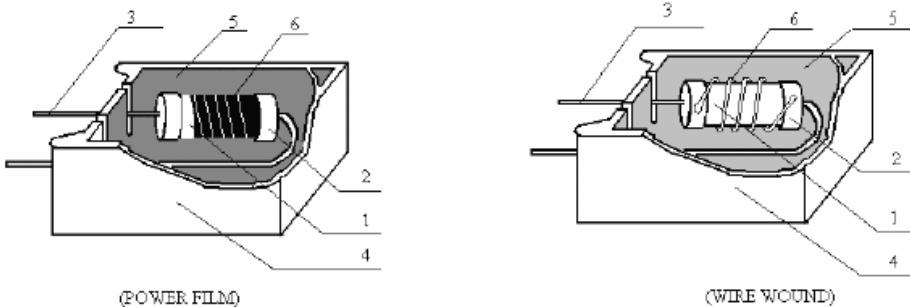

No.	Name	Material Generic Name
1	Body	$\text{Al}_2\text{O}_3$
2	Cap	Tin plated iron
3	Lead	Copper wire
4	Ceramic case	$\text{Al}_2\text{O}_3$ CaO
5	Filling materials	$\text{SiO}_2$
6	Resistance element	Power film: Metal Oxide Film Wire-wound: Alloys

## 8. Performance Specification

Characteristic	Limits	Test Methods (GB/T5729&JIS-C-5201&IEC60115-1)
Temperature Coefficient	$\geq 20\Omega: \pm 350\text{PPM}/^\circ\text{C}$ max.. $< 20\Omega: \pm 400\text{PPM}/^\circ\text{C}$ max..	4.8 Natural resistance changes per temp. Degree centigrade $\frac{R_2 - R_1}{R_1(t_2 - t_1)} \times 10^6 \text{ (PPM}/^\circ\text{C})$ <p><math>R_1</math>: Resistance Value at room temperature (<math>t_1</math>) ;  <math>R_2</math>: Resistance at test temperature (<math>t_2</math>)  <math>t_1</math>: <math>+25^\circ\text{C}</math> or specified room temperature  <math>t_2</math>: Test temperature (<math>-55^\circ\text{C}</math> or <math>125^\circ\text{C}</math>)</p>
Short-time overload	Resistance change rate must be in $\pm(5\%+0.05\Omega)$ , and no mechanical damage.	4.13 Permanent resistance change after the application of a potential of 2.5 times RCWV or Max.Overload Votage whichever less for 5 seconds.
Dielectric withstanding voltage	No evidence of flashover mechanical damage, arcing or insulation break down.	4.7 Resistors shall be clamped in the trough of a $90^\circ$ metallic V-block and shall be tested at AC potential respectively specified in the above list for 60-70 seconds.for cement fixed resistors the testing voltage is 1000V.
Resistance to soldering heat	Resistance change rate must be in $\pm(1\%+0.05\Omega)$ , and no mechanical damage.	4.18 Permanent resistance change when leads immersed to a point 2.0-2.5mm from the body in $260^\circ\text{C}\pm 5^\circ\text{C}$ solder for $10\pm 1$ seconds.
Solderability	95% coverage Min.	4.17 The area covered with a new, smooth, clean, shiny and continuous surface free from concentrated pinholes. Test temp. Of solder: $245^\circ\text{C}\pm 3^\circ\text{C}$ Dwell time in solder: 2~3seconds.
Terminal strength	No evidence of mechanical damage	4.16 Direct load: Resistance to a 2.5 kg direct load for 10 seconds in the direction of the longitudinal axis of the terminal leads. Twist test: Terminal leads shall be bent through $90^\circ$ at a point of about 6mm from the body of the resistor and shall be rotated through $360^\circ$ about the original axis of the bent terminal in alternating direction for a total of 3 rotations.
Humidity (Steady state)	Resistance change rate must be in $\pm(5\%+0.05\Omega)$ , and no mechanical damage	4.24 Temporary resistance change after 240 hours exposure in a humidity test chamber controlled at $40\pm 2^\circ\text{C}$ and $90\sim 95\%$ RH relative humidity

Load life in humidity	For Wire-wound: $\Delta R/R: \pm 5\%$ For Power film range: $< 100K\Omega \Delta R/R: \pm 5\%$ $\geq 100K\Omega \Delta R/R: \pm 10\%$	7.9 Resistance change after 1000 hours (1.5hours “ON” , 0.5hours “OFF” ) at RCWV or Max. Working Voltage whichever less in a humidity test chamber controlled at $40 \pm 2^\circ\text{C}$ and $93\% \pm 3\%$ RH.
Load life	For Wire-wound: $\Delta R/R: \pm 5\%$ For Power film range: $< 100K\Omega \Delta R/R: \pm 5\%$ $\geq 100K\Omega \Delta R/R: \pm 10\%$	4.25.1 Permanent Resistance change after 1000 hours operating at RCWV or Max. Working Voltage whichever less with duty cycle of 1.5 hours “ON” , 0.5 hour “OFF” at $70 \pm 2^\circ\text{C}$ ambient.
Low Temperature Storage	For Wire-wound: $\Delta R/R: \pm 5\%$ For Power film range: $< 100K\Omega \Delta R/R: \pm 5\%$ $\geq 100K\Omega \Delta R/R: \pm 10\%$	IEC 60068-2-1 (Aa) Lower limit temperature , for 2H.
High Temperature Exposure	For Wire-wound: $\Delta R/R: \pm 5\%$ For Power film range: $< 100K\Omega \Delta R/R: \pm 5\%$ $\geq 100K\Omega \Delta R/R: \pm 10\%$	MIL-STD-202 108A Upper limit temperature , for 16H.

## 9. Note

- 9.1. UNI-ROYAL recommend products store in warehouse with temperature between  $15$  to  $35^\circ\text{C}$  under humidity between  $25$  to  $75\%$  RH.  
Even under storage conditions recommended above, solder ability of products will be degraded stored over 1 year old.
- 9.2. Cartons must be placed in correct direction which indicated on carton, otherwise the reel or wire will be deformed.
- 9.3. Storage conditions as below are inappropriate:
  - a. Stored in high electrostatic environment
  - b. Stored in direct sunshine, rain, snow or condensation.
  - c. Exposed to sea wind or corrosive gases, such as  $\text{Cl}_2$ ,  $\text{H}_2\text{S}$ ,  $\text{NH}_3$ ,  $\text{SO}_2$ ,  $\text{NO}_2$ ,  $\text{Br}$  etc.

## 10. Record

Version	Description	Page	Date	Amended by	Checked by
1	First version	1~5	Mar.20, 2018	Haiyan Chen	Nana Chen
2	Modify characteristic	4~5	Feb.26, 2019	Haiyan Chen	Yuhua Xu
3	Modify characteristic	5	Nov.20,2020	Song Nie	Yuhua Xu
4	Modify the temperature coefficient test conditions	4	Nov.07, 2022	Haiyan Chen	Yuhua Xu
5	Modify Ordering Procedure Modify derating curve	2 3	Nov.13, 2024	Junying Ye	Haiyan Chen

© Uniroyal Electronics Global Co., Ltd. All rights reserved. Specification herein will be changed at any time without prior notice